

Department of Technical Co-operation for Development
and Economic Commission for Africa

Natural Resources/Water Series No. 18

**GROUND WATER
IN
NORTH AND WEST AFRICA**



UNITED NATIONS
New York, 1988

NOTE

Symbols of United Nations documents are composed of capital letters combined with figures. Mention of such a symbol indicates a reference to a United Nations document.

ST/TCD/5

UNITED NATIONS PUBLICATION

Sales No. E.87.II.A.8

04550

ISBN 92-1-104203-8

CONTENTS

	<u>Page</u>
Foreword	vii
Explanatory notes	ix
PART ONE - OVERVIEW	1
I. Large aquifer systems	1
II. Climatic conditions: effects on the recharge of the aquifers	3
III. Productivity of the aquifers	6
IV. Exploitation of the ground water	14
V. Conclusion	17
PART TWO - COUNTRY PAPERS	19
Algeria	19
Benin	37
Burkina Faso	53
Cameroon	67
Cape Verde	81
Central African Republic	108
Chad	115
Côte d'Ivoire	135
Egypt	149
Gambia	164
Ghana	173
Guinea	189
Guinea-Bissau	198
Libyan Arab Jamahiriya	213
Liberia	240
Mali	247

CONTENTS (continued)

	<u>Page</u>
Mauritania	265
Morocco	275
Niger	291
Nigeria	301
Senegal	311
Sierra Leone	325
Sudan	339
Togo	373
Tunisia	382
WATER RESOURCES: LIST OF UNITED NATIONS PUBLICATIONS	404

Maps and figures

Africa: A hydrological outline	x
Burkina Faso: Hydrogeological and hydrological outline	52
Cameroon	66
Cape Verde	80
Egypt	148
Ghana	172
Libyan Arab Jamahiriya: Morphology	212
Libyan Arab Jamahiriya: Annual rainfall (averages)	214
Libyan Arab Jamahiriya: Climatic zones	215
Mali: Location and lithology of the main hydrogeological units	In jacket
Mauritania: Schematic geological map. Position of the main aquifers	In jacket
Mauritania: General geological scale	In jacket
Mauritania: Classification and characteristics of ground-water resources	In jacket

CONTENTS (continued)

	<u>Page</u>
Morocco: Hydrogeological basins	274
Nigeria	300
Senegal: Diagrammatic map of ground-water resources	310
Sudan	338
Togo: Geological outline	372
Togo: Main geographic units of the coastal sedimentary basin .	374
Africa: Major hydrogeological groupings	In jacket
Africa: Ground-water resources	In jacket

FOREWORD

The Economic and Social Council, by resolution 675 (XXV) of 2 May 1958, requested the Secretary-General to take appropriate measures for the establishment, within the Secretariat, of a centre to promote co-ordinated efforts for the development of water resources. It also singled out ground-water problems as one of the priority subjects in the development of a programme of studies. Large-scale Ground-water Development, published in 1960, 1/ was the first study prepared in this field by the Water Resources Development Centre (now the Water Resources Branch of the Division of Natural Resources and Energy, Department of Technical Co-operation for Development).

The Advisory Committee on the Application of Science and Technology to Development, in its World Plan of Action, 2/ gave priority to ground-water exploration and development. In fact, in the course of the First and Second United Nations Development Decades, more than 100 projects assisted by the United Nations Development Programme (UNDP) and other United Nations technical co-operation programmes were entirely or partially devoted to ground-water prospecting, assessment or pilot development. (A list of ground-water projects in the Eastern Mediterranean and Western Asia sponsored by UNDP is contained in the annex to the present report.)

While such operational activities were developing, the need for a comprehensive review of the results of the projects and for a dissemination of relevant information became more evident. As a result, the Economic and Social Council, by resolution 1761 B (LIV) of 18 May 1973, requested the Secretary-General to take the necessary measures, within the budgetary limitations, to improve and strengthen the existing United Nations services for the analysis, evaluation and dissemination of world-wide data on natural resources, including water resources.

With respect to ground water, a first comprehensive review of the African continent was published in 1972 and 1973 under the title Ground Water in Africa 3/ as a synthesis of material available in the records and files of the United Nations. The material of the second volume in this series, Ground Water in the Western Hemisphere, 4/ was drawn from country papers which were prepared by hydrogeologists and by ground-water engineers, specialists of the countries concerned. This was also done for the third volume, entitled Ground Water in the Eastern Mediterranean and Western Asia, 5/ for the

-
- 1/ United Nations publication, Sales No. 60.II.B.3
 - 2/ United Nations publication, Sales No. E.71.II.A.18.
 - 3/ United Nations publication, Sales No. E.71.II.A.16.
 - 4/ United Nations publication, Sales No. E.76.II.A.5.
 - 5/ United Nations publication, Sales No. E.82.II.A.8.

fourth, entitled Ground Water in the Pacific Region, 6/ for the fifth, entitled, Ground Water in Continental Asia, 7/ and for the present volume, the sixth in the series, which is to be followed by a seventh on ground water in central, eastern and southern Africa and an eighth on ground water in Europe. This will complete the presentation of (a) a necessarily brief but full overview of the world's ground-water resources, (b) the state of knowledge about them and their potential, and (c) information about their exploitation and the problems involved.

The present work indicates the progress made since the publication of the first volume on ground water in Africa. A point to note is the large number of African specialists who have taken part in the drafting of the text. There is now hardly a single African country which does not have among its nationals university graduates or engineers specializing in hydrogeology or ground water.

It is to be hoped that this volume, which deals with a number of arid countries, in particular the "Sahelian" countries affected by long periods of severe drought since 1973, will contribute to the development of ground water which is so vital in this part of the world.

The United Nations wishes to thank for their valuable assistance the governmental organizations and the consultants and experts from Africa and other countries who have collaborated in the preparation of this work, in particular the Department of Water and Energy of Mali, the Office of Water Research and Planning of the Department of Water of the Kingdom of Morocco, the Mataria Desert Research Institute (Arab Republic of Egypt), the National Service for the Installation of Water Points of the Republic of Guinea, and the Office of Geological and Mining Research (Orleans, France), as well as A.M. Abdoul, N.B. Ayibotele, I. Barry, R.M. Blamdandi, A. Cavaco, P. Chaperot, Chekh Becaye Gaye, N.C. D'Almeida, E. De Boer, A. Diallo, M.A. Diallo, S.M. Dossou, J. Dubus, M. Faloci, D. Fernandopulle, R. Friedmen, J.A. Hanidu, M. Haupt, W. Iskander, M.T. Jones, L. Kossakowski, J.C. Lachaud, J. Margat, T. Mba Mpondo, L. Moullard, E. Njié, Saad Ali Sabet, O.M. Salem, M. Simonot, W.G. Strupczewski, D.Z. Sua, P.S. Zahir, E.H. Zander and H. Zebidi.

The simplified hydrogeological map of Africa appended to this volume was kindly supplied by Mr. J. Marget. He is warmly thanked for that. The Division of Natural Resources of the United Nations Economic Commission for Africa (ECA, Addis Ababa) helped with the collection of information on some countries for this publication, for which ECA is jointly responsible with the United Nations Secretariat in New York.

6/ United Nations Publication, Sales No. E.83.II.A.12.

7/ United Nations Publication, Sales No. E.86.II.A.2.

Explanatory notes

The following symbols have been used in the tables throughout the report:

A dash (-) indicates that data are not available or are not separately reported.

A blank indicates that the item is not applicable.

A full stop (.) is used to indicate decimals.

A slash (/) indicates a crop year or financial year, e.g., 1976-77.


Use of a hyphen (-) between dates representing years, e.g., 1975-1978, signifies the full period involved, including the beginning and end years.

Reference to "dollars" (\$) indicates United States dollars.

Details and percentages in tables do not necessarily add to totals because of rounding. Some of the data series are not homogeneous; they have been taken from various reviews and publications; the differences or divergencies may be due to typing errors.

The designations employed and the presentation of the material in this publication do not imply the expression of any opinion whatsoever on the part of the Secretariat of the United Nations concerning the legal status of any country, territory, city or area or of its authorities, or concerning the delimitation of its frontiers or boundaries.

The term "country" as used in the text of this report also refers, as appropriate, to territories or areas.

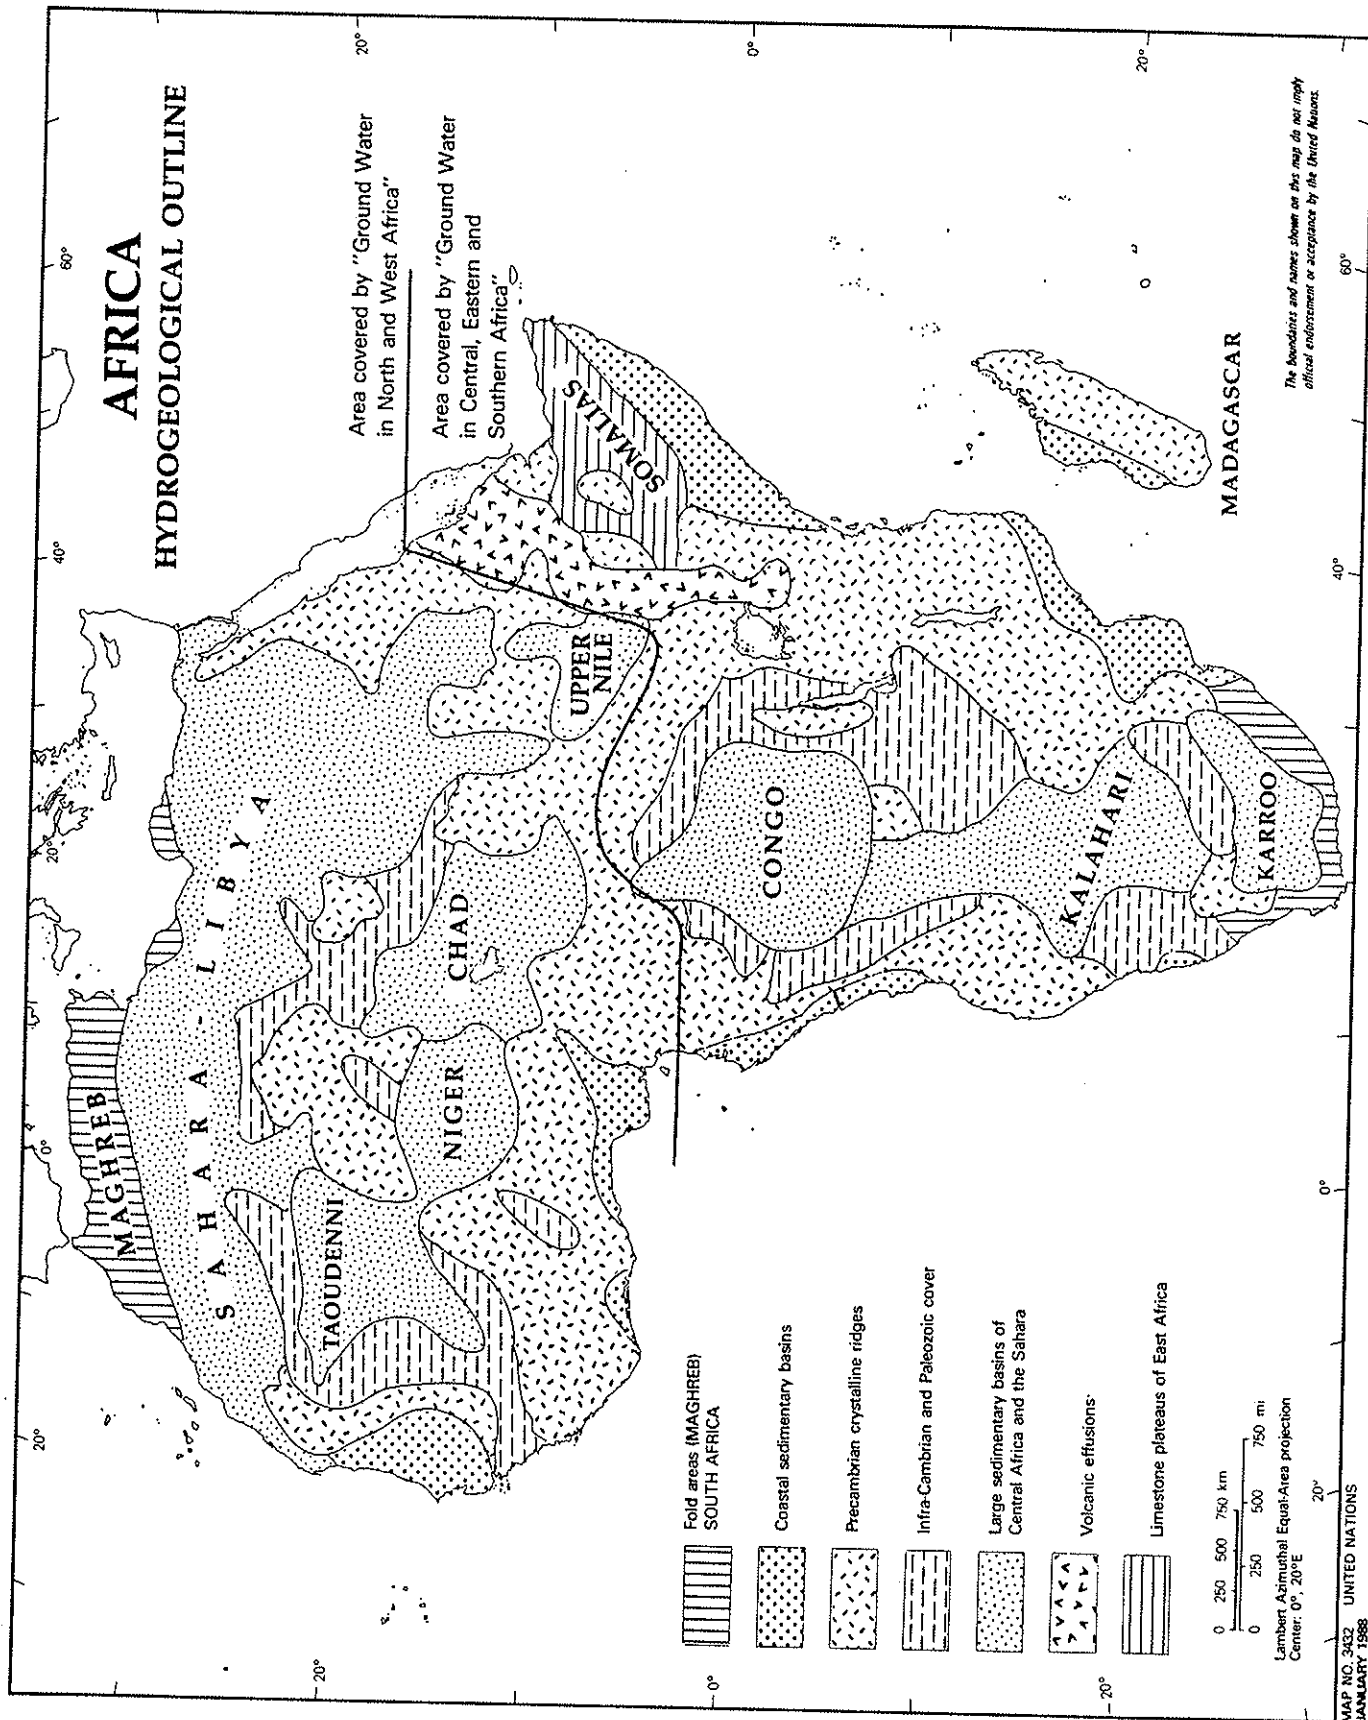

PART ONE

OVERVIEW

This volume deals with ground water from the standpoint of the physical conditions of the accumulation of this natural resource, the state of knowledge about its potential, its exploitation and the uses to which it is put. It deals with all the African countries north of the Equator, except for Ethiopia and Somalia which belong geographically to East Africa, to be covered in a second volume on all the countries of central-equatorial and southern Africa, including Madagascar and the neighbouring island countries and territories.

I. LARGE AQUIFER SYSTEMS

This vast territory of 17.2 million km² with 300 million inhabitants can be subdivided on the basis of geological, morphological and climatic considerations into a number of large aquifer systems in which the ground-water resources can be reasonably well distinguished from the standpoint of their accumulation, their fossil or renewable state and their accessibility.

i) To the north-west, the mountains and plateaus of the Atlas and the Rif and the Mediterranean and Atlantic coasts in the north and west. This is the "Maghreb" of Morocco, Algeria and Tunisia, north of the Sahara. From the geological standpoint these are mainly sedimentary formations strongly affected by Alpine orogeny. The region has contrasting landscapes: it has different climates ranging from the Mediterranean or subhumid type to the semi-arid or even arid type: Moroccan plains north of the Atlas, Algerian high plateaus; here the ground water is intensely exploited to an average extent of 80 or 90 per cent of the renewable resources or even higher in some places, especially in the semi-arid and arid areas.

ii) In the north-east, the Mediterranean fringe constitutes a kind of extension of the Atlas but much more modest in its relief, extent and altitude. The mountains receive quantities of rain which can recharge the neighbouring aquifers, but the renewable resources are small and generally overexploited.

iii) To the south of these areas lies the Saharan region and the deserts which form its eastern extension - the Libyan and Nubian deserts; this is an enormous, generally flat, monotonous territory where the rainfall is infrequent, irregular and very meagre, except over some mountainous areas. It is made up of sedimentary basins mainly of continental origin but with some lagoonal and marine basins in which the beds generally lie in regular horizontal or subhorizontal strata. Two sandstone formations constitute large aquifers of the fossil and Mesozoic types: the "intercalated continental" in Algeria and Libya and the "Nubian sandstones" in Libya-Egypt-Sudan. To the west (western Algeria and Mauritania), the formations are of hard Paleozoic rocks with low permeability in which the ground-water resources are much smaller, except locally.

- iv) The crystalline Precambrian basement rock underlying these sedimentary basins emerges in great masses at the west-east axis of the Sahara: Tiris-Adrar, Yetti-Karet (Mauritania-Algeria). The Hoggar mountains which rise to almost 3,000 m in volcanic peaks (Algeria) flanked in the south by the ranges of Adrar des Iforas (Mali) and Air (Niger), Tibesti (Chad), Ouaddai (Chad), Darfour (Sudan) and the majority of the territory to the east of the Nile as far as the Red Sea. As far as ground water is concerned, this is a mainly barren region, with the exception of a number of alluvial deposits at the foot of the mountains. When present - a fairly rare occurrence - the ground water is far from abundant and in many cases heavily mineralized.
- v) To the south of this ancient backbone the general situation of the aquifers is fairly similar to the one found in the north; here too there are enormous sedimentary basins subject to a desert climate, with hard and unproductive Paleozoic strata in the west (Tagant, Mauritania), except for a number of limestone layers, and with sandstone strata in the east: intercalated continental (Azaouad in Mali), the Air sandstone in Niger and the Nubian sandstone further east, which contain fossil aquifers.
- vi) The Chad basin, occupied in its centre by the eponymous lake which is shallow and has declined in size over the last decade, is formed by a complex of sediments of various ages, mainly recent, Quaternary and Cenozoic, in which the ground-water resources are considerable: in places artesian, but with relatively low unit yields per well, for the clay strata are frequent and extensive.
- vii) The basement-rock areas of West Africa which cover the majority of the territory of Guinea, Sierra Leone, Liberia, Côte d'Ivoire, Ghana, Togo, Benin, Burkina Faso and Cameroon, as well as large areas of Mali and Nigeria. The rocks are exposed to Sudano-Sahelian climatic conditions and are water-bearing in their altered and fractured parts. At its northern edge the crystalline shield of western Africa is flanked by a sandstone rim of Precambrian or Paleozoic age which constitutes a major aquifer in Mali and Burkina Faso. The unit yields obtainable from the wells or boreholes are not large except in a few cases (Bobo Dioulasso sandstone) but they are usually sufficient for village and livestock needs. The sedimentary basins in the central part of Niger, along the axis of which run the River Niger and its main tributary the Benoue, which has its source in Cameroon, are made up mainly of gray argillaceous Cretaceous formations containing artesian aquifers.
- viii) The coastal sedimentary basins are very different in extent, the largest being the Senegalese-Mauritanian basin which runs southwards into Guinea-Bissau. Then come the bevel-shaped coastal basin of Nigeria which narrows towards the east (Cameroon) and towards the west (Benin, Togo, Ghana), and the very narrow but economically important coastal basins along the shoreline of Guinea, Sierra Leone, Liberia, Côte d'Ivoire and Ghana. These basins contain recent, Quaternary and Cenozoic sediments with very productive sandstone and limestone layers. They are intensely exploited - sometimes overexploited.

II. CLIMATIC CONDITIONS: EFFECTS ON THE RECHARGE OF THE AQUIFERS

The territory is subject to very varied climatic conditions in which latitude plays an essential role. From the anticyclone of the Azores, a high-pressure centre, the trade winds blow towards the Equator and are deflected westwards by the rotation of the earth. In January a cool dry wind - the Harmattan - blows from the Sahara towards the west coast of Africa from Mauritania to the Niger delta. At this period the whole of Africa south of the equator is subject to a low-pressure system (below 700 mm). In July, in contrast, a high-pressure system prevails over southern Africa and a cyclonic depression is centred over the plateaus of Iran. As a result, the winds tend to blow towards the east and a monsoon from the south-west brings heavy rains to the western coast.

As a general rule the winds blow from the sea to the land, bringing rain; but there are notable exceptions: the Harmattan and in mid-year some local winds from the Maghreb which blow towards the Mediterranean, and some regular winds which blow towards the north-east of Africa in the direction of the Arabian Peninsula. The mountains halt the wet winds.

In January, the regions to the south of the 20th parallel N (from Nouakchott to Port Sudan) have average temperatures below 20°C. In July, the whole of the continent north of the equator (except for the coastal zones) has temperatures above 30°C, sometimes 32°C.

The temperature ranges are very small in the equatorial regions (10°C) but increase in step with distance from the equator; they are from 20°C to 30°C in the Sahara.

The rainfall is irregular with wide variations from season to season and year to year.

In the extreme north of the continent the Maghreb and certain coastal parts of Libya and Egypt and, in the extreme south, the Cape region have rainfall of the Mediterranean type (winter rains).

The very wet equatorial regions to the south of 10° latitude N have two rainy seasons when the sun is high above the horizon, generally from March to June and from September to November. From the 10th to the 15th parallel N the tropical regions have only one rainy season, from May to October. Lastly, the subtropical desert region, i.e. the whole of the north of the continent with the exception of the Mediterranean zone, receives only occasional and irregular showers.

The annual rainfall is two to six metres along the coast of West Africa from Conakry to Abidjan and from the Niger delta to Libreville in Gabon; one to two metres in some mountainous regions of the Maghreb and south of the line from Dakar to Mogadishu; 500 to 1,000 mm in the High Atlas, in the coastal regions of Algeria and Tunisia and in a strip 300 to 500 km wide to the north of the line mentioned above; less than one metre to the

north of the line from Nouakchott to Port Sudan, with the exception of the Maghreb, the majority of this region receiving less than 20 mm.

Climatic zones

The climatic zones, characterized by very different vegetation types are as follows:

- Mediterranean zone with dry summers (hot season) northern Maghreb.
- Steppe zone with the following subdivisions:

Pre-Saharan regions south of the Maghreb with drier summers. This climate is sometimes described as "semi-arid Mediterranean". The rainfall is less abundant and the temperature range broader than in the Mediterranean zone.

Regions to the south of the Sahara with semi-arid tropical climate of the Senegalese or Sahelian type. They receive more abundant rainfall in the hot season from June to September.

- Wet savannah zone or zone of tropical Sudanese climate. The wet season grows longer the closer to the equator, but in some places the uninterrupted dry season can last from four to five months. The belt of wet savannah is 500 km wide on average.

- Desert zone with Saharan climate (Sahara).

- Equatorial forest zone with very wet climate and two rainy seasons or continual rain. It includes, over a width of 300 km, the region of the Gulf of Guinea from Freetown to Accra and from Lagos to Douala, southern Cameroon and the Congo basin as far as the rift valleys.

- Coastal fringe zone, a narrow coastal strip in which the climate is heavily influenced by the sometimes very powerful coastal currents. The Canaries current, flowing north to south from Tangiers to approximately the 20th parallel N, is cold; the Guinea current, flowing west to east from Dakar to the equator, is warm.

Aridity and evaporation

The climatic zones can also be classified according to the index of humidity or aridity (Thornthwaite), which takes into account both the temperature and rainfall and its distribution and which expresses a characteristic ratio between potential evapotranspiration and the amount of rainfall.

The surface aquifers (lakes) undergo large variations in level owing to the imbalance in some years between the headings "evaporation" and "recharge". This is particularly true of Lake Chad. It is also true of the unconfined ground-water aquifers when the piezometric surface is shallow in comparison with the soil. Evaporation produces - and can be

measured by - concentrations of salts in the aquifers. The question of the depth to which evaporation takes place is disputed. However, all authors agree that this effect operates for several metres (five metres on average and as deep as eight to ten metres). Some authors speak of much greater depths.

Conclusion

The amount of rainfall available to recharge the ground-water aquifers depends on three main climatic factors: the annual rainfall, its distribution in time or the "heaviness of the precipitation", and the value of the potential evapotranspiration, which is essentially a function of latitude, altitude and temperature.

In some cases each of these three factors singly can have a decisive influence.

In all the regions in which the rainfall exceeds roughly 1 to 1.2 metres a year, neither the heaviness of the rain nor the evapotranspiration value should be taken into account, for a large part of the rainfall is almost always available for infiltration, in some places after runoff. In this case the decisive factor is the amount of the rainfall.

In the case of rainfall below 250 mm, it is the heaviness of the precipitation which is important. It is interesting to note that in conditions of increasing aridity - decline in rainfall accompanied by an increase in the evaporation potential - the heaviness of the showers increases to the point where most of the annual precipitation sometimes falls in a few hours. Accordingly, in the Sahara some daily figures can produce a surplus - which can persist over several days - of rainfall over potential evapotranspiration; this gives the water time to infiltrate and thus recharge local aquifers in particular cases.

The following table compares some potential evapotranspiration values with the rainfall at a number of climatological stations in Africa.

	Annual rainfall (cm)	Potential evapotrans- piration (cm)	Quotient (percen- tages)
<u>Arid and hyper-arid zone</u>			
<u>(rainfall below 250 mm):</u>			
In Salah (Sahara)	0.5	140	0.3
Blakra (southern Algeria)	18	133	
Moudjeria (Mauritania)	17	187	3
<u>Coastal regions</u>			
Nouadhibou (Mauritania)	4	116	4
Tarfaya (Morocco)	11	85	13
<u>Zone with rainfall between</u>			
<u>250 and 1,000 mm:</u>			
Kayes (Mali)	74	187	30
Algiers: wet Mediterranean climate	76	92	83

Thus in some regions a large or even overwhelming part of the rainfall is almost immediately lost through evaporation. The heading "evapotranspiration" in the water balances is often the largest. Some authors offer the following figures for the various regions of Africa: evapotranspiration, 40 to 98 per cent; infiltration, 2 to 40 per cent; runoff, 2 to 12 per cent.

In regions with rainfall between 250 mm and one metre (steppe and dry savannah) the potential evapotranspiration is the decisive factor, for the rainfall is spread out better in time. During the rainy season, which can vary widely from one year to the next, the potential evapotranspiration can still have a large value. However, a very variable remainder is almost always available for runoff and infiltration. In contrast, during the dry season which can last from three to six months, some regions of Africa have climatic conditions of the semi-arid or arid type while receiving more annual rainfall than some countries in the wet temperate zone of Europe. During the dry season, the evaporation effect can be considerable in surface and shallow aquifers.

Some recent studies on the treatment of rainfall data in the Sahelian countries tend to show that the rainfall falls into two distinct categories:

- A "monsoon" system with moderate rainfall fairly well distributed in time and little variation from year to year. To some extent this rainfall can help to maintain the vegetation but most of the water evaporates after having soaked the upper layers of the soil.

- A system of very heavy, brief and frequent showers which produces large amounts of surface runoff and deep infiltration. This type of rainfall is essential for the renewal of surface- and ground-water resources. It is the decline in the heaviness or frequency of these showers which causes "drought" when the main consequence is a drop in the level of water in the wells, which can even dry up completely. Lastly, a drop of 50 per cent in the amount of total annual rainfall as a result of less frequent showers can mean so surface runoff or recharging of the aquifers.

III. PRODUCTIVITY OF THE AQUIFERS

The values given below are by way of example. Additional data will be found in the country papers (see Part Two).

Extensive sand formations

In Africa sand dunes cover large areas north of the 14th parallel. Little is known about their role as aquifers in the Sahara. But it is known that the sands themselves, despite their great permeability, cannot provide a large reservoir in many cases since they quickly lose, through runoff or evaporation, the rainwater which they absorb.

Country	Location	Geology	Flow rate per installation
Mauritania	Plain of Kaffa	Sand dunes	5 to 10
	Plain of Assaba	Sand dunes	5 to 10
Senegal	Malika	Sand with clay	26
Cape Verde	Tiaroye	Sand dunes	50

Alluvial fill, deltas, chott deposits, Quaternary formations of the Chad basin and coastal sedimentary basins

Country	Location	Geology	Flow rate per installation (m ³ /h) <u>a/</u>	Drawdown (m)
<u>Fluvial alluviums.</u> These aquifers are among the most important and serve large populations.				
Algeria	Wadi Biskra	Sands-gravels	-	-
Morocco	Doukkala	Sands-gravels	10 to 1,000 m ³ /day	-
	Tafilalet	Gravelly alluviums	-	-
	Sous	Gravelly alluviums	Up to 360	1
Mauritania	Wadi Seguelil	Gravelly alluviums	10	
Egypt	Nile	Coarse Pliocene-Pleistocene gravels	1000	3
<u>Coastal or continental alluviums</u>				
Côte d'Ivoire	Treichville lagoon	Coarse sands	210	-
Guinea	River Nunez	Alluviums	20 to 50 (subartesian boreholes: 7)	-
Togo	Coastal zones	Argillaceous sands	3 to 5	-
Cameroon	Flats	Fill formations	10 to 80	-
<u>Coastal sedimentary basins</u>				
Cote d'Ivoire	Abidjan	Paleocretaceous sands and limestones	18	80
Benin-Togo	Coastal region	Cretaceous sands	1 to 35 m ³ /h/m; (average: 8 to 15)	-
Togo	Afagnagan	Cretaceous sands	18	10
Libya	Syrte	Miocene limestones and sands	25	42
Morocco	Agadir	Pliocene limestones and sandstones	5 to 20 m ³ /h/m	-
	Plains of Doukkala and Berrechid	-	10 to 100	-
Senegal	Basin (total)	Maestrichtian sandstone	15 to 120 (artesian)	-
Tunisia	Zarzis-Djerba	Upper Miocene	50 (artesian)	-

a/ In the column "Flow rate per installation", the underlined values indicate a specific yield.

Terminal continental sandstones and conglomerates (Late or Post-Cretaceous)

<u>Terminal continental</u>			
Burkina Faso	Bobo Dioulasso	-	90
Mali	Gondo	-	50 to 100
Mauritania	Trarza	Sandy intercalations	(up to 300/day) 1 to 4
	Bennichab	Sandy intercalations	30
	Nouakchott	Sandy intercalations	15
Senegal	Casamance	Argillaceous sand-sandstone	6 m ³ /h/m
Togo	Lomé-Agouévé	Variegated sandstone	5 to 40 m ³ /h/m

Intercalated continental, Nubian sandstone and other continental Precretaceous or Cretaceous continental sandstone

Algeria	Chardaia	Intercalated continental argillaceous sandstone	variable
Cameroon	Bénoué-Garoua	Cretaceous sandstone	10 to 20, up to 50
Nigeria	Sokoto	Consolidated Eocene sands	heavy flows (variable)
Egypt	Casis de Kharga	-	3,000 to 4,000 per day (artesian)

Limestone tableland of the hammadas of northern Africa (Pliocene-Pleistocene)

The hammadas cover vast areas south of the Atlas; their surface is generally made up of a subhorizontal plate of hard Pliocene-Villafranchian lacustrine limestones with varying degrees of sandiness, often overlying softer sand-clay formations. The scant rainfall which infiltrates in the hammadas quickly circulates through a karstic system, flows towards peripheral or central depressions and is rapidly lost through evaporation. The few wells found in the hammadas are fed from dune or alluvial formations. Water-drilling operations have generally not produced positive results.

Karstified limestone aquifers of the Jurassic, Cretaceous (North African Cenomanian-Turonian plate) and Eocene periods

Country	Location	Geology	Flow rate per installation (m ³ /h)	Drawdown (m)
Algeria-	High plateaus	Jurassic limestones	150 (artesian)	
Morocco	-	Liassic limestones	Up to 500 (artesian)	
	Doukkala	Upper-Jurassic marly limestones	10 to 100	
	Bahira	Dolomitic limestones	150 to 200	
	Sous	Cenomanian-Turonian limestones	Up to 1,200	
		Cretaceous sandy-marly limestones	1 to 10	
Mauritania	Trarza	Eocene limestones	0.1 to 1	
Senegal	Pout-Ndiass	Paleocene limestones	Up to 4	
Tunisia	Djebel Zaghouan	Liassic limestones	2,000 (in 6 springs)	

These few examples show that the karstified limestones of North-West Africa can yield rates of flow often in excess of 50 m³ per hour, sometimes as high as 100 and even several hundred in certain cases.

Tectonized zones of northern Africa with complex structures of marl-sandstone, marl-limestone, flysch, etc., of the Jurassic and Cretaceous periods.

The ground-water resources are very local; they are found mainly in fractured zones with thin limestone or sandstone seams alternating with schists, marl-limestones, clays, etc. The available yields are very variable.

Dolomitic-limestone massifs and plateaus of the Upper Precambrian and Cambrian periods

The dolomitic-limestone sedimentary formation (of Upper Precambrian and Cambrian age) is often very thick and constitutes a major ground-water reservoir:

Dolomitic limestones of Tin Hrassan (Burkina Faso) in arid zones. Transmissivity: $5 \times 10^{-4} \text{ m}^2/\text{s}$. Flow: $4 \text{ m}^3/\text{h}$, with a drawdown of 10 m. Storage coefficient: 1.8×10^{-3} ;

Fissured dolomitic limestones of Atar (Mauritania). Flow: $70 \text{ m}^3/\text{h}$, with a drawdown of 4 m. Such a flow is exceptional for an arid area; it is produced by a river bed infiltrated by flood waters;

Precambrian and Cambrian limestones of the Anti Atlas (Morocco). A number of overflow springs have flows of 20 to $40 \text{ m}^3/\text{h}$ and up to $250 \text{ m}^3/\text{h}$;

Mention must also be made of the dolomites of Tiara (Burkina Faso) and Gondo with its karstic sink-holes (Mali), for which no figures are available.

Precambrian and Paleozoic hard sandstones, schist-sandstones and quartzites

Country	Location	Geology	Flow rate per installation (m ³ /h)
Mauritania	Hodh	Cambrian pelitic sandstones	Up to 0.2 to 0.5
		Brazer sandstone	2 (maximum)
	Ayoun el Atrous	Precambrian sandstones	0.2 to 0.3
Togo	Bombouaka	Sandstone	0.3 to 7
	Dapango	Sandstone	3 to 7 (maximum)
Togo-Benin	-	Atakora quartzites	2 to 3, up to 7

Schists (mainly Precambrian and Paleozoic) and clays

When they are not totally impermeable these formations do contain some meagre water resources, mainly in fracture zones. Some examples of available yields per installation are given below:

Country	Location	Geology	Flow rate per installation (m ³ /h)
Ghana	-	Volta schists	Very low
Guinea	-	Black Gothlandian slates	Very low in fractures and seams
Burkina Faso	Banfora	Schist-sandstone	12 (exceptional)
Mali	Nara	Cambrian schists	Very low
	Azaoud-Timbuktu	Metamorphized Pre-Cambrian schists	0.5
Mauritania	Atar	Schists under alluvium	20
Togo	Sansanne-Mango	Schists	<u>0.3 to 1 per day</u>
	Buen	Marly-sandy schists	<u>0.5 to 10 per day</u>

Examples of available yields per well and borehole in crystalline zones

Country	Location	Geology	Flow rate per installation (m ³ /h)	Drawdown (m)
Cote d'Ivoire	Yamoussoukro	Fractured granites	6	-
	Daloa	Granitogneiss	2 to 4 (up to 12)	12
Benin	Parakou	Fractured granites in tectonic depressions	7 to 8	-
Benin-Togo	-	Birimian schists, quartz seams	3 to 7 (exceptional)	-
Ghana	-	Granites and granodiorites with quartz seams	5 to 20 m ³ /day	-
Burkina Faso	Various	Mica schists	less than 1 m ³ /day	-
	Various	Granitogneiss	1 to 4	10 to 20
Mauritania	Fort Detrick	Mica schists and gneiss with pegmatitic seams	20 m ³ /day	-
	South-east	Diorites	0.5	-
Chad	Ouaddai	Granitic sands	2	-
Togo	Elavagnon	Mica schists and graniteogneiss	2 to 5	6 to 20
	Kande	Chlorite schists quartz seams	7 to 12	9 to 15
	Dapango	Alkaline granite-gneiss	1 to 5 m ³ /day	-
	Palime	Granites and granodiorites with amphibolites and quartz	5 to 20 m ³ /day	-

In summary, a flow rate of 5 m³/h is a good one for granites and granitogneiss; a rate of 1 m³/h is considerable for mica schists and metamorphic schists. Better yields are obtained in the quartz zones.

Crystalline and metamorphic rocks (basement formations, granites and gneiss)

Since they have virtually no porosity, the crystalline rocks are impermeable except in faulty, fractured or altered zones. The best yields are usually obtained when a relatively thick altered stratum overlies a fault zone.

The nature and structure of the altered stratum vary according to the parent rock. This stratum can be almost entirely argillaceous and therefore barren.

Volcanic rocks

Lavas, especially basalts, dolerites and certain basal rocks which sometimes give high yields can be put in a separate category; a few examples are given below:

Fissured dolerites in arid zones - Ayoun el Atrous (Mauritania): less than $0.1 \text{ m}^3/\text{h}$; non-fractured: 0.2 to $0.3 \text{ m}^3/\text{h}$;

Basal rocks of Akjoujt (Mauritania): 30 to $45 \text{ m}^3/\text{h}$, with a drawdown of 13 m ;

Basal rocks of Conakry (Guinea): 13 to $72 \text{ m}^3/\text{h}$ (very rainy tropical climate), with a drawdown of 20 to 50 m ;

Green rocks of Kongolikan (Burkina Faso), fractured: $3 \text{ m}^3/\text{h}$.

Conclusion

There is almost nowhere in Africa where ground water is not found at one depth or another. The highest flows are provided by clay-free alluviums, continental or marine Cretaceous sandstones and karstic limestones.

Most of the ground water is acceptable for human consumption and therefore for livestock as well.

In arid zones the ground water is usually of calcium/magnesium bicarbonate facies at the higher level, i.e. near the regions where the surface runoff infiltrates. It then acquires a higher sulphate content and finally increased amounts of chlorine and sodium at the end of the course in the regions where the evaporation effect is high and operates directly on shallow aquifers. This is particularly the case in pre-Saharan North Africa for the sabkhas (continental depressions).

Some geological formations, especially of Permian-Triassic or Cretaceous age and lagoonal origin, contain mineral salts which pass in solution into the ground water. This is particularly the case in North Africa.

In the coastal sedimentary basins, often made up of permeable formations, pumping causes sea-water intrusion which tends to contaminate the fresh water aquifers.

In the Precambrian basement rock in tropical rain country the water is usually not very mineralized or aggressive.

Mineral-water and thermo-mineral springs abound in the African continent in the fracture zones. They constitute a major potential resource which has been explored and exploited in only a few places.

IV. EXPLOITATION OF THE GROUND WATER

In Africa as in the rest of the ancient world ancient, densely populated civilizations with advanced social organization and a sophisticated way of life were associated with the big rivers. These rivers furnished abundant water, rich soil, and fish and game in their valleys and deltas, as well as means of transport and places of refuge.

Away from the big rivers the surface-water resources are scanty especially in the dry season. In tropical Africa they are limited to water-holes. In the northern Africa the ancient inhabitants, the Berbers, usually established themselves in the mountainous regions near the sources of permanent rivers. It was the Arabs, the occupiers of the plains and Saharan oases, who developed the use of ground water through the construction of wells and infiltration galleries, employing the original techniques of Central Asia and the Middle East. Various methods of dewatering were also imported from those regions.

However, until recent times and with the exception of Arabized Africa, ground water was drawn off only from shallow holes dug in alluvial beds devoid of surface water in the dry season. These crude wells are in general use in the pre-Saharan regions. They are rarely more than a metre deep and provide temporary water points still frequented by nomads; they usually last only a short time, for flood water in any amount destroys them.

Traditional wells and drains

The digging of wells and construction of traditional drains - underground galleries linking aligned wells - was practised mainly in arid countries under Arab or Turkish influence in northern Africa, including the oases of the Sahara, Libya and Nubia and some of the Southern fringes of these deserts.

The wells were excavated with simple digging tools in soft earth of good consistency. Sometimes the walls or vaults were reinforced in places with timbering or brickwork, either dry-stone or with lime mortar. Some of these wells, especially in arid piedmont areas, attain considerable depths, sometimes 100 metres and more.

The well systems described in the Bible and very numerous in Iran, where they are called kanats, are widespread in northern Africa where the total length of the galleries amounts to several thousand kilometres. In Egypt and the Sahara they are called foggaras; in Morocco, rhettaras. This system makes it possible to obtain the ground water from the soil without

using dewatering methods. The galleries are first built as trenches which climb underground until they intersect over a certain length the saturated formations to be drained. The length of the galleries is limited by the maximum depth of the "head well", which depends on the techniques used and the nature of the terrain.

These drains can only be built in formations of suitable consistency where the digging is easy: lacustrine formations, soft sandstone, tuff, consolidated alluvium, etc. The aquifer must also be relatively shallow and lie under land which slopes sufficiently for the galleries to discharge in the open air; but the slope must not be too steep, for the head wells must be of a reasonable depth. These foggaras are found in the beds of certain wadis and their environs: middle or adjacent beds on the flanks of gently sloping valleys and at the foot of dejection cones spreading from piedmonts. Some drains penetrate rock formations and reach aquifers whose flow is blocked downstream by natural obstacles.

The construction, cleaning and maintenance of these drains - arduous and dangerous work - is now very difficult. Many of the installations are deteriorating and collapsing for lack of maintenance. In small aquifers with irregular recharge the drains can cause a permanent discharge - often unused - which quickly leads to total depletion: this is particularly the case in the plain of Haouz (Marrakesh) and the plain of Sous (Morocco).

The traditional means of raising the water from the wells vary according to region, raw materials, depths and uses. For shallow irrigation wells (norias) bucket wheels operated by animal traction are widely used. For greater depths a simpler procedure is often employed; it involves a treadmill worked by an animal (cow or camel) which hauls up a leather water-bucket by means of a system of ropes and pulleys. This method raises hardly more than a few cubic metres a day.

The deepest wells are drawn by hand, for they are used only to supply the population and livestock. Beam wells are a traditional feature of the landscape in the Nile Valley. They are also found in Sudan and in all the sub-Saharan countries from Chad to Mauritania.

Wells drilled and dug by modern methods

In the deserts the discovery of ground water by deep drilling is essential for oil exploration works, especially for the mixing of drilling mud and the raising of oil by injecting water under pressure. The general geological studies and the geophysical studies carried out for this purpose have led to the identification of deep confined aquifers which have then been exploited by means of artesian boreholes. Thus, even before the proclamation of their independence the African territories under British administration benefitted from the experience acquired in oil exploration in the Middle East during the second quarter of the twentieth century and from the progress made in the same period by British and Swedish manufacturers of drilling equipment for the exploitation of ground water. In French Africa drilling for water also underwent a great expansion, especially from the time

when oil exploration activities were started in the Sahara, i.e. from the 1950s.

The ground water was first exploited by borehole in the arid zones of northern Africa: Algeria, Morocco, Tunisia, Egypt and northern Nigeria where there are vast stocks of ground water. This ground water sometimes has natural outlets in topographically low-lying areas such as the chotts, where it is subject to direct evaporation; in other cases these depressions offer favourable conditions for the drilling of artesian wells. Artesian wells have been dug in chotts in Tunisia from the end of the 19th century using big augers operated by groups of workers. Mention must also be made of the many artesian bore-holes drilled in the 1940s and 1950s in the New Valley, i.e. in the depressions of El Kharga and El Dakhla in Egypt's Western Desert.

Many small boreholes have also been drilled in all the countries of the semi-arid or arid zone in order to supply from shallow aquifers the administrative or economic urban and rural centres and modern agricultural enterprises. These works were first carried out in northern Africa; they were then extended to the wetter areas and as far as the equator, for the wet tropical countries also need ground water to supply their towns and villages.

The number of water-drilling rigs in Africa has increased rapidly over the past decade, especially in the arid countries. These rigs are used by a number of African and foreign companies and by State services such as departments of water development, or equipment, etc.

In most cases the boreholes are not equipped with motorized pumps. In rural areas many types of hand-operated or animal-traction pumps have been tried out. Some of these pumps are particularly simple and tough, for example the India Mark II developed with the help of UNICEF, which is now manufactured in Africa, in particular in Mali.

In addition to drilled wells, there are many wells dug by hand on the initiative of the administration in areas where they could not be constructed by the methods traditionally used by the local people (shovels and picks). In areas of hard rock, particularly Paleozoic schists and sandstones, compressed air tools and explosives are used to excavate the wells. These operations are usually costly.

In many African countries in the wet tropical zone the formations usually contain very loose clay seams which make it impossible to dig wells by hand, for the walls collapse even before the digger reaches the water-bearing strata underlying the clays. In such cases an appropriate lining must be used; this is always tricky and sometimes expensive or difficult, which means that the wells must be drilled.

The construction of wells is also very difficult in areas of sand-clay sediments where the installation of a prefabricated reinforced-concrete lining is always essential.

The installation of motorized pumps is justified only when the water requirement is large, and account must be taken of economic and social factors, the chemical quality of the water and the height of the lift. The communities or bodies concerned must also have the technical and financial means to maintain and repair the installations.

During the last 15 years the digging and drilling of wells has undergone spectacular development in the region, partly as a result of the International Drinking Water Supply and Sanitation Decade and partly because of the periods of exceptional drought (1973-1975 and 1983-1985) which affected the arid and Sahelian zones north and south of the Sahara.

Thus, for a Sahelian country in which about 20 wells a year were dug in 1965/66 the number of wells drilled had increased to four or five hundred in 1985.

Ground water is intensively used to supply urban and industrial areas, especially in arid regions and coastal zones. This is particularly true of Tangiers, Fez, Meknes, Marrakesh, Agadir, Constantine, Tripoli, Benghazi, Port Sudan, Ibadan, Cotonou, Lomé, Bobo Dioulasso, Abidjan, Bissau, Banjul, Dakar and Nouakchott.

The exploitation of ground water in Africa is intended mainly to meet the water needs of the towns, villages and pastoral areas and those of industrial and mining enterprises. In contrast, irrigation with ground water is limited either by its cost and the expenditure of convertible currency involved in the purchase of pumps, motors and fuel, or by the exhaustion of the aquifers in arid regions. Apart from the countries of North Africa - from Morocco to Egypt - the areas irrigated by ground water are still very small. However, small market-garden centres have been spontaneously created around the hand pumps installed in villages and this kind of small-scale operation is tending to increase (Mali).

CONCLUSION

The sharp increase in the use of ground water in Africa goes hand in hand with the continent's rapid entry into the modern world. This use is important for all sectors of the economy but was first concentrated in the towns, the mining centres and some priority farming regions. It is now tending to be extended to the small centres in the most isolated tropical and desert regions. A considerable effort to this end is being made both by Governments and by international and bilateral technical co-operation bodies. This sharp increase in the use of ground water is almost always one of the fundamental conditions for economic and social development, for it is an essential factor in the life or survival of many existing centres of population and a fundamental condition for the establishment of new centres.

However the development of ground water is beset with many difficulties. Firstly, the areas with the best aquifers from the standpoint of the capacity

of the rocks to absorb, hold and discharge large quantities of water are the desert zones where there is little or no recharge from rainfall and the coastal zones subject to deep intrusion of sea water in the direction of the wells. In contrast, the rainy tropical areas have rocks which are poorly suited to the absorption and storage of water supplied by rainfall and surface runoff.

Furthermore, ground-water prospecting and the drilling and digging of wells are usually difficult and expensive operations owing to the weakness of the infrastructures, the unfavourable natural conditions, the remoteness of the zones to be reached and the wide dispersal of the villages, as well as the lack of equipment, qualified personnel, project-uptake facilities, and investment and maintenance funds.

Lastly, and this is not the least problem, African villagers do not always have the motivation, the basic technical capacity and the material resources required for the satisfactory operation, maintenance and repair of the manual pumps supplied to them. Substantial progress has nevertheless been made in recent years in several fields: training of technical personnel at various levels, including management and decision-making; rational planning of drilling operations; introduction of appropriate technologies for the construction and restoration of wells and for the movement of the water; introduction of relatively cheap and effective methods of prospecting (particularly remote-sensing and geophysical techniques); computerization of data and inventories; manufacture of equipment - especially hand pumps - in Africa itself; grassroots animation and education of villagers and creation of African water-drilling enterprises.

However, much remains to be done to ensure that the ground-water resources of North Africa are managed to best effect, i.e. without wastage or long-term threat to the existence of these resources in terms of both quantity and quality. This comment applies equally to the intensely exploited coastal zones, especially at Nouakchott, Dakar and Lomé.

Nor are the objectives of the International Drinking Water Supply and Sanitation Decade about to be achieved for the villages of the countries of Western and Central Africa south of the Sahara. However, it can be hoped that towards the end of the century the necessary infrastructures - wells and boreholes - and the corresponding elementary superstructures will be in place in all the villages and that the maintenance of the pumps, if not their replacement when they are worn out, will be undertaken mainly by the villagers themselves. The organizations of the United Nations system - as can be seen from the list of projects in the annex - will have contributed to this vast undertaking in a very considerable and in many cases decisive manner.

LIBERIA

Area: 111,369 km²

Population: 2.06 million (United Nations estimate, 1983)

I. BACKGROUND

Natural regions

In Liberia the altitude increases fairly regularly from the coast towards the interior. The country can be divided into four zones parallel to the coast: the coast zone itself; the hills; the plateau eroded by the water courses; and the high plateaus. As a rule the boundaries between these zones are not clearly defined and they merge gradually into each other.

The coastal zone is 10 to 15 km wide, mostly flat and covered with sand. The inland limit of the tides, usually marked by the first rapids on the coastal rivers, corresponds to the limits of these flat areas; further inland the coastal zone consists of low land flooded by the watercourses and the low hills, which slope gently up towards the hill zone itself. The 100 contour line marks the approximate limit of the coastal zone.

The hill zone consists of broad low areas alternating with discontinuous lines of hills running north-east. The low areas lie between 100 and 200 m and the hills rise to 200 and 300 m.

The plateau eroded by the river system has two levels. The lower and more extensive level lies at 300 m of altitude and the higher level at 600 m. The ridges of the high plateaus dominate this level and become more numerous in the north-east of the country.

In the north the mountainous zones contain narrow deep gorges and it is difficult to recognize the parts of the plateau lying at their base. As a result, the mountains of the lower plateau are unconsciously considered part of the high plateaus.

Climate

Liberia is situated at the heart of the zone of wet tropical forest. The average annual rainfall along the coast is five metres, decreasing to two metres towards the interior. The isohyets run roughly parallel to the coast, with deflections caused by the mountains. The only notable seasonal variation is the "wet season" from December to April. Some places, Monrovia for example, have less wet periods lasting one to two weeks, usually in August, May and November, which can be included in either the wet or the dry season, depending on the year.

There is little variation in temperature between an absolute minimum of 16°C and an absolute maximum of 30°C, depending on the month. The maximum and minimum values occur in the interior, particularly on the high plateaus. Little information is available about evaporation measured in the pan at the three meteorological stations: Kongo, Fendel and Suakoko, for long series of

observations have not been made. It is not easy to estimate the daily amounts of evaporation in the pan in the wet season in Liberia, and in many cases the values represent only orders of magnitude lower than the real figures. The Penman method is therefore used to estimate the evaporation from a free surface on the basis of meteorological data from two stations: Robertsfield and Firestone-Harbel. The average annual value at the two stations is 1,633 mm but the standard gap is 19 mm/year and 32 mm/year respectively. At these two stations 45 per cent of this total amount evaporates during the dry season, 38 per cent during the wet season and 17 per cent during the transition periods (May and November).

Surface water

The whole of the country is well drained by rivers flowing to the Atlantic. The river basins open to the sea can be divided into two categories:

- The large basins (about 20);
- The small coastal basins which cover only three per cent of the country.

The first six of the 20 large basins drain two-thirds (65,5 per cent) of the country. They are, from east to west:

Number	Name of river	Area (km ²)	
		Total	In Liberia
1	Mano	7,750	5,720
2	Lofa	10,382	8,994
3	Saint Paul	20,440	11,293
4	Saint John	17,089	14,509
5	Cestos	12,634	10,070
6	Cavalla	30,225	12,398

Since its establishment in 1972 Liberia's Hydrological Service has given special attention to the quantitative evaluation of the country's surface water resources. In 1978 it published the first hydrological year book for the period 1972-1976, covering all the country's stations. Some figures on the relative flow characteristics of the six main basins are given below:

River	Location of station	Area of basin (km ²)	Depth of runoff (mm/year)	Number of years measured
Mano	Kongo	5,540	1,178	9
Lofa	New Hope	10,200	895	4
Saint Paul	Walker's Bridge	9,760	850	19
Saint John	Baila	3,857	1,085	15
Cestos	Sawolo	4,582	429	18
Cavalla	Nyaake	12,608	1,271	12

If the distribution of rainfall (annual totals) over the country is taken into account, the depth of runoff for the whole of the basin should be higher than indicated in the table above.

On the basis of these values, the total potential of the six main rivers at their mouths has been evaluated at 98 km³ per year.

The rivers' flow varies during the year. As a rule the highest levels occur in September, and the lowest in March. Since the daily amount of rainfall can exceed 150 mm at some points, it can be estimated that for the small basins the values should be much higher than those given in the last column of the table above.

In order to evaluate the flow coefficient it is necessary to know the amount of rainfall in the basin. However, large areas of the main basins are located outside the country in regions for which data are not yet available. Accordingly, it is not possible to calculate the flow coefficients for the various basins. The sediment discharge of Liberia's rivers and streams is not known as it has not been measured. Some settling tanks have been built, but the water of the rivers which flow in the vicinity of mining operations (Saint John, Lofa and Mano) contain high concentrations of solid matter. Liberia's lakes are found along the coastal zone which extends for 560 km from Grand Cape Mount to Cape Palmas. During the wet season they are in contact with the ocean. During the dry season they are separated by sandbars of varying size. In view of these seasonal changes and the geomorphological conditions, some of these "lakes" are called lagoons. Their behaviour is heavily influenced by the size of the drainage basins which lie above them. In the case of the lakes which receive their water from the biggest drainage basins, contact is made with the ocean when the first flood waters arrive at the beginning of the wet season; however, the formation of sandbars ceases at the end of the dry season. All the country's lakes are suitable for fish-farming and tourism and sports activities.

Their fresh or slightly saline surface water is often used in small quantities for domestic purposes in rural areas. The economic potential of Lake Piso, the country's largest lake, has not yet been exploited.

Geology

The whole of the country is within the Precambrian crystalline Guinean shield, which consists of igneous and metamorphic rock. The metamorphic gneiss, granitogneiss and schist, which can be distinguished from each other by geophysical and petrographical techniques, are penetrated by igneous blocks of Jurassic age; the basement rock is overlain by lateritic deposits which can be up to 30 m thick.

Sedimentary formations are found in the coastal zone in two systems of sands and conglomerates. Fluvial and deltaic deposits are found only along the coast. Most of the diabasic dykes run in the region's usual north-west direction. The streams and rivers often follow the lines of the fault and fracture zones which are found throughout the country.

II. GROUND-WATER RESOURCES

Several ministries and other government bodies are directly or indirectly concerned with water resources in Liberia. A co-ordination body was set up in 1981: the National Water Resources and Sanitation Board. The following are the government and other services involved:

1. The Liberia Water and Sewer Corporation (LWSC), which is responsible for urban water supplies. Nine towns have distribution networks;
2. The Ministry of Agriculture, responsible for irrigation;
3. The Ministry of Health and Social Affairs, responsible for sanitation;
4. The Liberia Electricity Corporation (LEC), responsible for hydroelectric power;
5. The Ministry of Rural Development, responsible for the sinking of wells and boreholes in rural areas;
6. The bodies responsible for rural development projects, three of which were in operation in the country in 1984, supplying water to rural areas, sometimes in co-operation with the Ministry of Rural Development;
7. The Hydrological Service attached to the Ministry of Land, Mining and Energy, which has overall responsibility for water resources.

The only government body with responsibility for ground-water research and study is the Liberia Hydrological Service. The LWSC and LEC are concerned only with the sale of water to the consumer.

In the past ground water has been studied on only a modest scale but for very specific purposes. A research campaign including geophysical prospecting and test drilling in the coastal sandstone indicated that the stocks of fresh water in these aquifers are extremely small. The LWSC commissioned a study company to carry out drilling with a view to supplying six towns. The methods used included the interpretation of aerial photographs, geophysical prospecting and six-inch diameter test drilling to a depth of 100 m. The boreholes were considered positive if they gave discharges of 5 m³/h with an acceptable draw-down. They were then widened to a diameter of eight inches.

Most of the country is covered by metamorphic rock and the areas of sedimentary formation are very small; there are therefore no large aquifers. As the laterite cover has poor permeability, the ground water is found mostly in the faults and fractures and in the altered part of the basement rock. Some test-drilling results are given below.

Depth of aquifer and geological age	Location	Depth	Specific yield (m ³ /h/m of drawdown)
Metamorphic basement rock	Town of Buchanan	Six wells 80 to 100 m	0.25 to 2.60
Metamorphic basement rock	Town of Zwedru	Two wells 63 and 44 m	7.60 and 24.5

Some wells drilled in the faults and fractures have given fairly high yields; this may be due to the high recharge from the abundant rainfall.

The water quality in the basement fractures is generally good. Most of the wells have a neutral pH, except when they draw their water from the laterite cover (pH below 6). The specific conductivity values do not exceed 500 millimhos/cm, and the chloride values are below 100 mg/l. The combined iron and manganese content is below 0.3 mg/l. The average dry residue is 250 mg/l, consisting mainly of acid carbonate and silicate.

Very little information is available about ground water in Liberia and it covers only a few points in the country. Research is continuing but on a small scale and for specific purposes. The resources are not available for large operations requiring geophysical work and major drilling.

III. DEVELOPMENT OF GROUND WATER

The Ministry of Rural Development and the Liberia Water and Sewer Corporation are responsible for the development of water resources. As part of the rural development programme of the Ministry of Rural Development, wells are being dug and drilled and springs are being equipped in rural areas with the help of nine light cable-tool rigs and 40 drillers training in the country. There are also a few digging teams working in light ground.

The LWSC manages the water distribution networks and it is also responsible for the study of water resources for new networks. The studies are entrusted to study companies and the construction work to subcontractors. The LWSC does not have the equipment for ground-water exploration.

The country has just one drilling company which was set up only very recently; it has two big percussion rigs and employs five drillers. Up till now these rigs have been used only for study of the ground water at shallow depths with a view to the installation of large-diameter hand-dug wells and drainage galleries.

Ground water is exploited to supply urban distribution networks and to establish water points in the villages.

Five towns are supplied from ground-water aquifers. Three of them have 150-metre tubewells; the other two are supplied from large-diameter dug wells.

In rural areas many wells have been dug in the laterite surface formations; dug wells are found in the small towns and villages, no matter what their size, but only when professional drillers are established in the area. The maintenance of the hand pumps poses considerable problems in the rural areas, with the result that many of the tubewells have been abandoned. Two mining companies use ground water taken from boreholes which they drilled to meet their own needs.

Agriculture uses very little ground water simply because the rainfall is so heavy. Ground water is used to a limited extent in the "dry" season for irrigation in nurseries (oil palms, coffee and cocoa bushes, etc.).

As agriculture develops in the future, ground water might play a bigger role in irrigation in the dry season and also in drinking water supplies. The Government has launched major well digging and drilling programmes in rural areas. It is also possible that ground water will be exploited in increasingly large amounts to supply the towns.

It cannot be said that Liberia has serious ground-water problems. In view of the abundant rainfall, the heavy infiltration and the considerable recharge potential of the aquifers, there is so far no danger of over-exploitation. Sea-water intrusion might pose a problem in the coastal zone, but this has not been the case so far.

Artificial recharge is not envisaged for the moment. It might create problems in view of the high solid content of the surface water.

IV. CONCLUSION

Liberia has abundant water resources which generally meet its current requirements. However, this situation might change if agriculture developed and farmers wanted to grow crops throughout the year and if more hydroelectric plants were built.

At present the main problem is that of water quality. Most of the surface water is vulnerable to pollution, especially in the dry season. Ground water can be found throughout the country at a reasonable depth; it is used to supply all the towns of average size (over 300 buildings) and many big villages (100 to 300 buildings). Hand-dug wells are found only in the areas where there are qualified well-diggers. Most of them belong to private individuals in the towns, but they are common property in the villages.

The wells dug and drilled under the rural water-supply programme and equipped with hand pumps supply free water to villagers and feed standpipes in six big towns which have distribution networks. Only metered water supplied to private outlets is expensive.

The United Nations Development Programme, with the Department of Technical Co-operation for Development as executing agency and in association with UNICEF, has financed ground-water study and drilling projects in rural areas in Liberia.

V. REFERENCES

Few documents are available on ground water in Liberia. The data must be extracted from reports on projects to supply medium-sized towns such as Vahun, Careysburg, Sakleppe, Bahn, Kahnple, Tappita, Graie, Robertsport, Foya, Kolahun and Zorzor. Where rural areas are concerned, useful reference can be made to the United Nations project reports listed at the end of this volume.

Mention may also be made of the following fairly recent reports which are kept in the archives of the Liberia Hydrological Service:

- Reconnaissance Survey for Utilization of Warner Creek for Monrovia Industrial Park;
- Shallow Aquifers in Monrovia Based on Inventory of Water Wells;
- Surface and Groundwater Resources of Cape Mount Peninsula;
- The Coastal Lagoons between Monrovia and Marshall;
- Hydrogeological Characteristics of the Unconsolidated Sediments in the Monrovia Area;
- Warner Creek Watershed, an Evaluation;
- The Captured Springs and Hand-Dug Wells in Lofa and Nimba Counties.

In all, there are some 50 to 60 reports and other documents on ground and surface water resources. However, there are no maps or reports on regional hydrogeological studies.